



ZIGGY







∠iggy is designed to illuminate curved facades,



Finish- Silver anodize, black or white as an option **Efficacy**- 84lm/W to 101lm/W for white colour, 39lm/W for RGBW

Input voltage- 24V DC or 48V DC Dimming- 1-10V, DALI or DMX. Life: 50,000 Hours L80 B10

Warranty: 3 years

available upon request.






























Model number: ZI-6W-30-3K-F-S	
Wattage per module	2W 3W 4W 5W 6W
Lens	8° 15° 25° 30° 60° 90° 10° x 30° 10° x 50°
ССТ	2700K 3000K 4000K 5000K RGBA RGBW Tunable White
Snoot	N A F
Controls	S: Standard D: DALI A: 0-10V D1: DMX

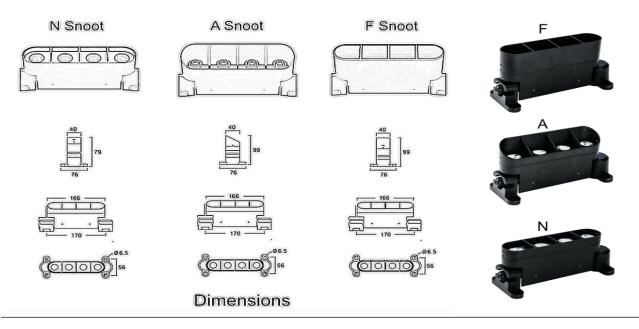








Optical design technology combined with TM-30-15 ready to create a beautiful light

Increasing the center luminous intensity and raising the focus effect as a spot light. Suppresses scattered lightleaking outside with sealed casing and louvres that reduces glare. Abundant choice of light distribution variants that caters to every demands of a lighting project.

The CRI and light colour rendering of the LED offers a high of 93-CRI average for R1 to R8, with the red reproduction at particularly good score of 90-CRI in R9. The colour fluctuation is visually inconspicuous as compared to conventional LED sources.





" Glare free" design The "invisible" light source

"45° cut -off angle design" creates a visually comfortable space The light is hardly visible in the eye view even when viewed from a lower level.

