



UFO

UFO's catenary mounted LED luminaires are best in their class, **shallow** domed housing which provides architectural **strength**, dimensional **stability** as well as superior heat management, smart design beautify any **urban space** in day time and provides downward lighting to **minimise glare** and better vision at night, precision designed optical system provides **superior** horizontal and vertical **uniformity** with excellent control of both glare and light spill, suitable for **harsh** environments.

Material- Rugged die-cast aluminium, resistant to saline environments and corrosion, tempered glass cover n PC.

LED source- Philips Lumileds 3030/5050

Efficacy- 125-140lm/W


Input voltage- 100-277V 50/60Hz

Surge protection- 10KV


Life: 100,000 Hours L70

Warranty: 5 years




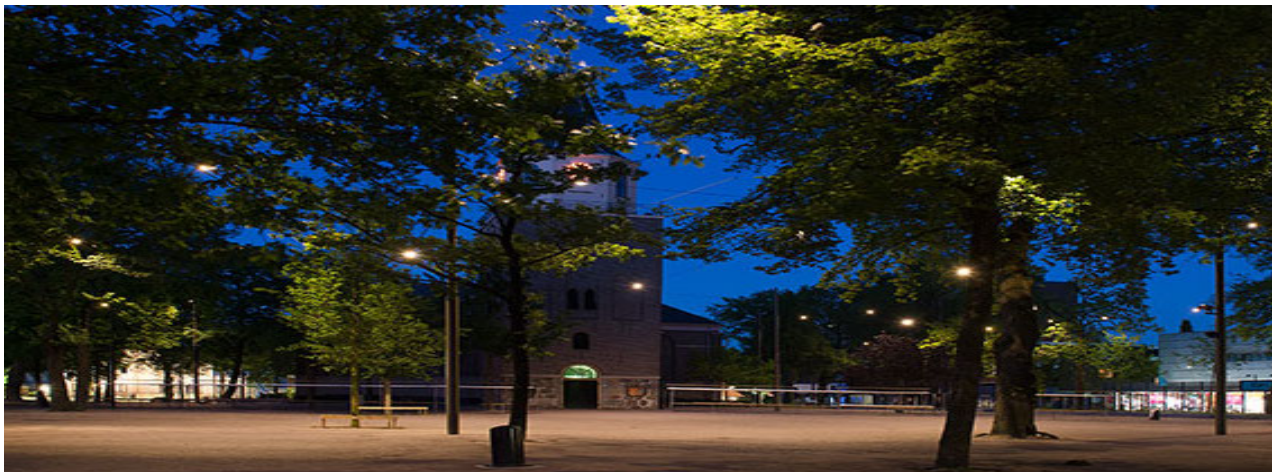


Model number	Wattage	CCT	Optic	Controls
UF-27W-4K-5S-S	27W	3000K 4000K 5000K	IM	S: Standard
	37W		IIM	A: 0-10V Dimming
	56W		IIIM	P: PWM Dimming
	70W		IMS	T: Timmer dimming
	90W		5S	PE: PE Cell
	120W			

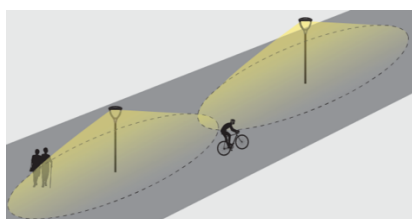


1MS-wide Symmetry

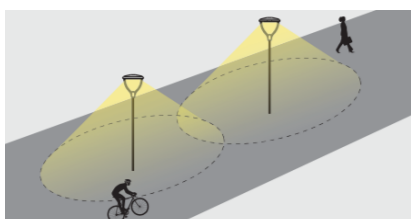

5S-Symmetric

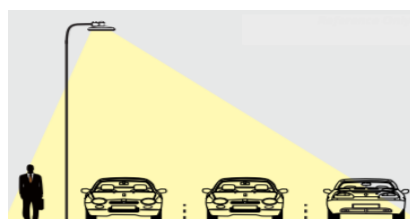

1M-2M-3M

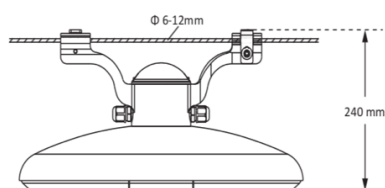

Dimensions



Surge protector 10KV



Air vent