

VITA

Vita's LED panels are backlit and provides homogeneous illumination, equipped with low glare micro-prism UGR<19 diffuser ideal for office lighting, designed to reduce glare and improve light distribution through precision formed lens optics, all sides and corners are turned in and hemmed, removing sharp edges for safe handling and installation, available with different wattages and sizes to suit various applications, high CRI and smart controls for human centric lighting available as an option.

Material- Extruded aluminium frame, anti UV PMMA micro prism diffuser.

Finish- white powder coated paint


Efficacy- 115lm/W

Input voltage- 100-240V 50/60Hz

Dimming- 1-10V, DALI or DSI.


Life: 50,000 Hours L80/B10

Warranty: 3 years

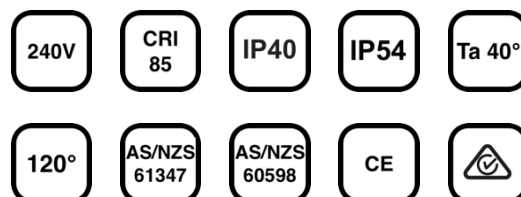



Model number	Size mm	Wattage	Mount	IP	CCT	Controls
VI-3-32W-R-40-4K-S	1: 295x295x35	16W	R: Recessed S: Surface P: Pendant	IP40 IP44 IP54	3000K 4000K 5000K 6000K HCL	S: Standard D: DALI A: 0-10V E: Emg M: Sensor
	2: 295x595x35	24W				
	3: 595x595x35	32W				
	4: 295x1195x35	40W				
	5: 595x1195x35	50W 80W				

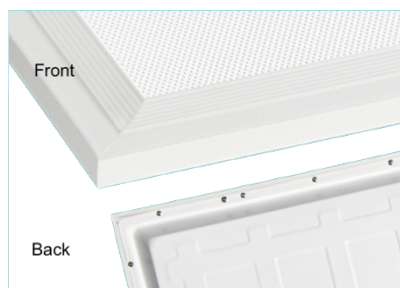

Suspension Mount



Spring clip



Surface Mount frame

